


7962-001-000 Slate/Verde Primavera




安装方式

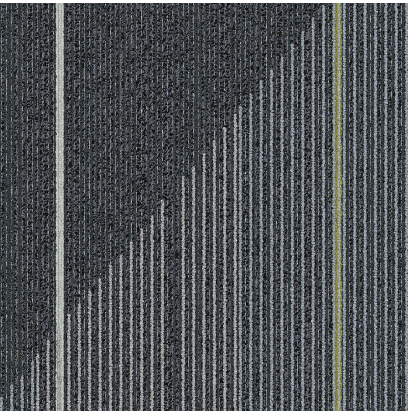


上下错拼




顺铺



转角



左右错拼



无方向

所有产品的规格信息由测试样品的平均值推算而出，受产品的生产工艺及内在的差异影响，会存在合理的偏差范围，最终解释权归英特飞模块地毯(中国)有限公司。更多关于产品信息的声明请查看www.interface.com.cn/page/disclaimer

样式名 Detours 颜色名 Slate/Verde Primavera 系列名 Detours & Detours Ahead

产品编号	7962
产品规格	
产品结构	Tufted Textured Loop
纱线系统	100% Solution Dyed Nylon
染色方式	100% Solution Dyed
防污	Protekt ² ®
抗菌	Intersept [®]
更多产品规格	
簇绒机规格	12th Gauge
针密	32/10cm 8/in
毯毛厚度	2.0mm ±0.5mm
地毯总厚度	5.5mm ±0.5mm
产品尺寸	50*50
标准底背	GlasBac [®]
性能指标	
应用区域	Commercial - Heavy Duty
稳定性-剥离强度	ASTM D3936 ≥ 3.0 lbs/in ISO 11857 ≥ 26 N GB/T 26843 ≥ 26 N
稳定性-尺寸稳定性	ISO 2551 ≤ 0.1% QB/T 2755 ≤ 0.1% ISO/PAS 17984 ≤ 0.2%
稳定性-簇绒拔出力	ASTM D1335 ≥ 8.0 lbs ISO 4919 ≥ 30 N QB/T 1090 ≥ 24 N (QB/T 2755)
磨损性-脚轮椅	ISO 4918 ≥ 2.4 QB/T 2755 ≤ 0.15%
磨损性-威特曼鼓轮或六足滚筒	ASTM D5252 ≥ 3.0 at 12000 cycles ISO 10361 ≥ 3.0 at 22000 cycles GB/T 26844 ≥ 3.0 at 22000 cycles
耐光色牢度	AATCC 16E ≥ 4 at 60 AFU's ISO 105-B02 ≥ 4-5 GB/T 8427 ≥ 4-5
耐摩擦色牢度	AATCC 165 ≥ 4 ISO 105-X12 ≥ 4-5 GB/T 3920 ≥ 4-5
耐水色牢度	AATCC 107 ≥ 4 ISO 105-E01 ≥ 4-5 GB/T 5713 ≥ 4-5

阻燃性 - 乌洛托品(甲胺)测试	Pass DOC FF 1-70 or ASTM D2859 Test ISO 6925 $\leq$ 25.4 mm GB/T 11049 $\leq$ 25.4 mm
阻燃性 - 热源辐射测试	ASTM E648 Class 1 ISO 9239-1 B1 CHF $\geq$ 4.5 kW/m ² (GB 8624) GB/T 11785 B1 CHF $\geq$ 4.5 kW/m ² (GB 8624)
阻燃性 - 烟气密度	ASTM E662 < 450 ISO 9239-1 $\leq$ 750 %.min (GB 8624) GB/T 11785 s1 $\leq$ 750 %.min (GB 8624)
抗静电性	AATCC 134 < 3.0 kV ISO 6356 $\leq$ 2.0 kV GB/T 18044 $\leq$ 2.0 kV
抗菌处理	AATCC 174 Parts II & III 99% reduction/No mold 7 Days ASTM E2471 Complete Inhibition
通用测试	
吸音性	Absorption Coefficient - NRC 0.0 - 0.2
动态负载	ISO 2094 < 15% Thickness loss QB/T 1091 < 15% Thickness loss
静态负载	ISO 3415 < 15% Thickness loss QB/T 1092 < 15% Thickness loss
VOC	ASTM D5116 Accredited ISO 10580 Accredited
热阻	ASTM C518 R Value 0.5
环境指标	
回收成分含量 %	59%
消费前回收	57%
消费后回收	2%
室内空气质量	Green Label Plus ASTM D5116 # GLP1354 UL GREENGUARD Gold UL 2818 # 71238-420
产品可持续性	NSF/ANSI 140 Gold Sustainable Carpet Assessment Standard
成分与生命周期影响	Environmental Product Declaration - GlasBac®
产品寿命末期	Carpet to Carpet Recycling
隐含碳排放(从摇篮到大门)	5.16 kg CO ₂ eq./m ²
技术资料	
安装指南	View recommended Interface Installation Guidelines online
维护指南	View recommended Interface Maintenance Guidelines online
回收再利用	View details on our ReEntry™ Program
质保	15 Year Standard Warranty
制造工厂	ISO9001&14001&45001 Certified Plant in Taicang, China