



2470-003-000 Fuscous

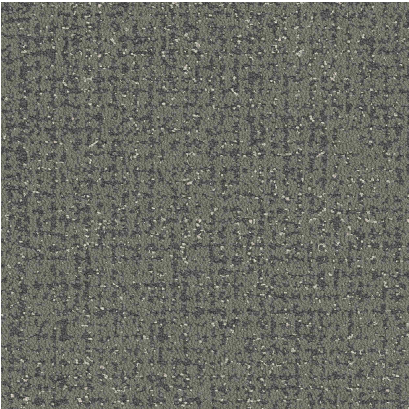

Installation Methods



All product specifications reflect averages derived from product sample testing, are subject to normal manufacturing and testing tolerances and inherent pattern variances, and may be changed without notice. For more information about these and other important attributes of the product(s) described herein, including recycled content and product warranty information, please see www.interface.com.cn/page/disclaimer

Product ChromaDots 2 **Colour** Fuscous **Collection** ChromaFlex

Product Number 2470

Product Specifications

Product Construction Tufted Textured Loop

Yarn System 100% Solution Dyed Nylon

Dye Method 100% Solution Dyed

Soil/Stain Protection Protekt2®

Preservative Protection Intersept®

More Product Specifications

Machine Gauge Tapestry

Stitches 39/10cm 10/in

Pile Thickness 3.0mm ±0.5mm

Total Thickness 7.0mm ±0.5mm

Size Description 50*50 or 25*100

Backing Structure GlasBac®

Performance Specifications

Area of Use Commercial - General Duty

Stability - Delaminating AS/NZS 2111.16 ≥ 50 Newtons
ASTM D3936 ≥ 2.5lbs/in

Stability - Dimensional Stability ISO 2551 ≤ 0.2%
ISO/PAS 17984 < 0.2%

Stability - Tuft Bind ASTM D1335 ≥ 8.0 lbs
AS/NZS 2111.15 >30 Newtons

Wear - Castor Chair BS-EN 985 r ≥ 2.4

Wear - Vetterman Drum TWC-TM247 / TWC-TM251 / TWC-TM284 Colour: ≥3 & Structure: ≥3,BS ISO 10361 Overall Change ≥3.5 (Heavy Contract)

Colour Fastness to Light AS2001 1.4.21 ≥ 4
AATCC 16E ≥ 4

Colour Fastness to Rubbing and Crocking AATCC 165 ≥ 4
AS/NZS2111.19.1 ≥ 4

Colour Fastness to Water AATCC 107 ≥ 4
AS2001.4.21 ≥ 4

Flammability - Methanamide Pill BS6307/ISO 6925 Radius ≤ 7.6

Flammability - Radiant Panel ASTM E648 Class 1
ISO 9239-1 B1

Flammability - Smoke Density ASTM E662 Density ≤ 450
ISO 9239-1 Density < 750 %.min

Antistatic	AATCC 134 < 3000 Volts BS ISO 6356 ≤ 2.0Kv
Lifetime Antimicrobial	AATCC 171 Washed ASTME-2471 Complete Inhibition AATCC174 Parts 2 & 3 99% reduction. No mold 7 Days
Generic Tests	
Acoustic – Nylon	Absorption Coefficient - NRC ≥ 0.10
Dynamic Loading	AS/NZS 2111.2 < 12.5% loss ISO 2094 ≥ 85%
Static Loading	AS/NZS2111.13 < 6% Loss ISO 015/3415 Thickness after 60 mins recovery >85%
Green Carpet (VOC)	ASTM D5116 Accredited ISO 10580 Accredited
Thermal Resistance	ASTM C518 R Value ≥ 0.5
Environmental Specifications	
Recycled Content %	59%
Pre-Consumer (Total)	57%
Post-Consumer (Total)	2%
Indoor Air Quality	Green Label Plus ASTM D5116 # GLP1354 UL GREENGUARD Gold UL 2818 # 71238-420
NSF Sustainable Carpet	NSF/ANSI 140 Gold Sustainable Carpet Assessment Standard
Ingredients and Life Cycle Impacts	Environmental Product Declaration - GlasBac®
End of Life	Carpet to Carpet Recycling
Embodied Carbon (Cradle to Gate)	5.8 kg CO ₂ eq./m ²
Technical Information	
Installation	View recommended Interface Installation Guidelines online
Maintenance	View recommended Interface Maintenance Guidelines online
Reclamation	View details on our ReEntry™ Program
Warranty	15 Year Standard Warranty
Manufacturing Location	ISO9001&14001&45001 Certified Plant in Taicang, China